



INVERTED MOUNT BLOCK & TACKLE BALANCE WITH FIELD REPLACEABLE CARRIER



HOOK MOUNT
OPTION

SCREW MOUNT OPTION

EASY FIELD REPLACEMENT
BALANCE & CARRIER REMOVE WITHOUT NOTCH OUT

MAXIMUM SASH OPENING
ACHIEVE EGRESS UTILIZING SMALLER SASH

BALANCE TRAVELS WITH THE SASH
NO NEED TO PAINT OR COVER BALANCE

DURABLE, ONE PIECE DESIGN
PROVIDES MAXIMUM STRENGTH AND SAFETY


DESIGNED FOR RESIDENTIAL TILT APPLICATIONS
SASH WEIGHTS UP TO 45 LBS

MUSIC WIRE SPRINGS BY CALDWELL
*FATIGUE RESISTANT PROVIDING CONSISTENT
PERFORMANCE*


REAR LACED CORD
PREVENTS INTERFERENCE WITH TILT LATCHES

LENGTHS: 8 - 46 INCHES
WEIGHT RANGES: 2 - 45 LBS
AAMA CLASS 2
VERIFIED COMPONENT

CARRIER & BALANCE REMOVAL PROCESS

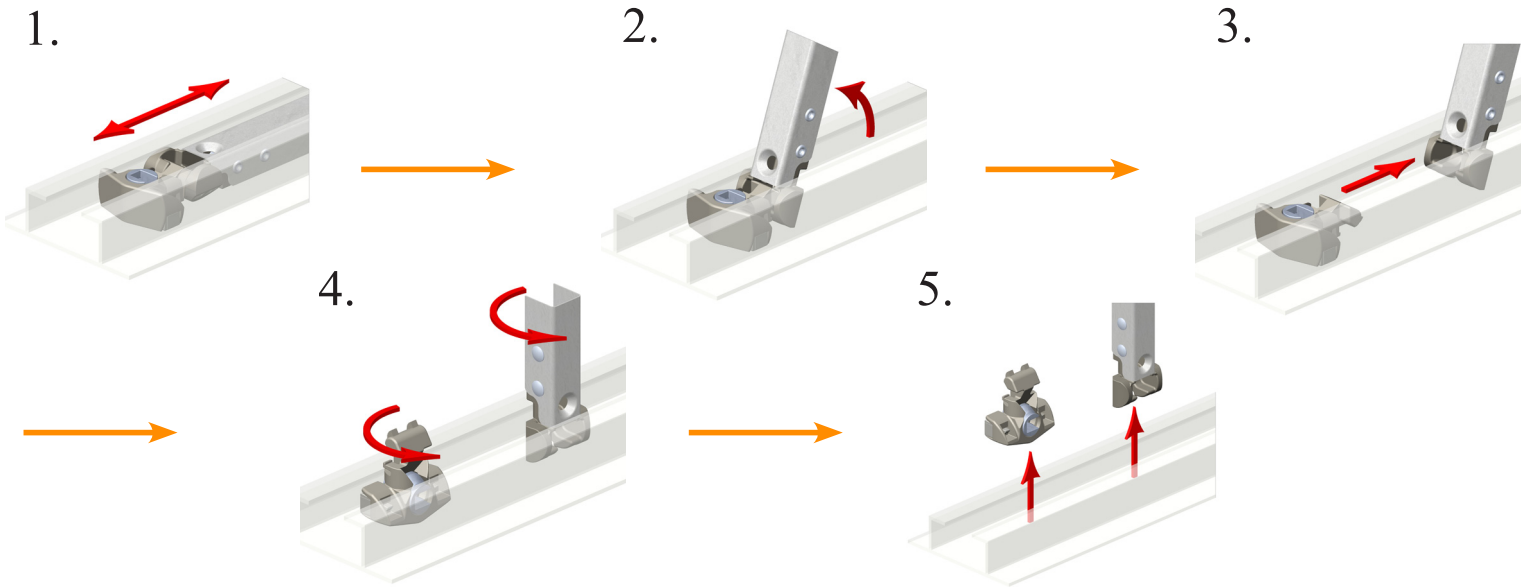

PRODIGY™ WEIGHT CAPACITY CHART

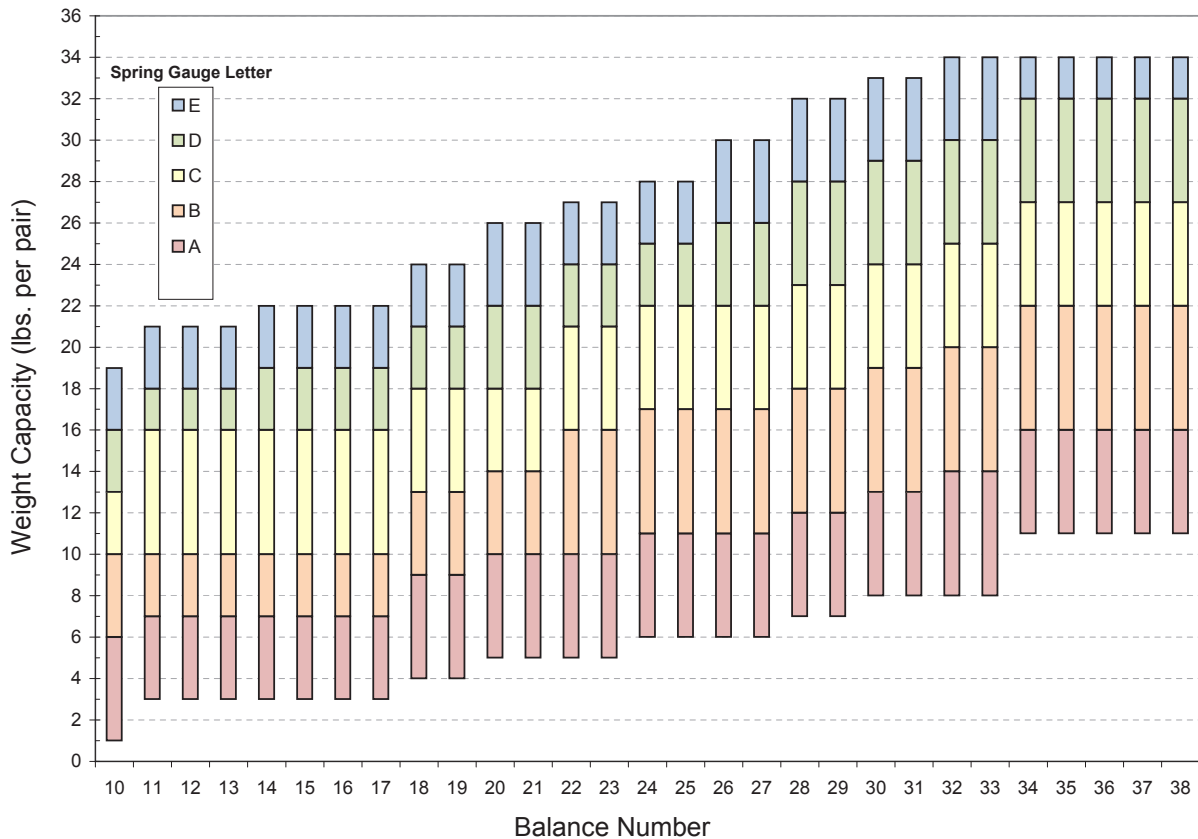

HOW TO ORDER:

Please use the chart above to help you in choosing the correct part to order:

1. Find your balance number (ex. 26)
2. Choose the weight capacity needed (ex. 24 lbs)
3. Follow your balance number and weight capacity to the point where they intersect to find your spring gauge letter. (ex. D)
4. Please order using your Balance Number - Spring Gauge Letter. (ex. 26-4)